CTSD-331

CamTron Outdoor PTZ Dome Camera

Features and Specifications

CAMTRON

PTZ Camera

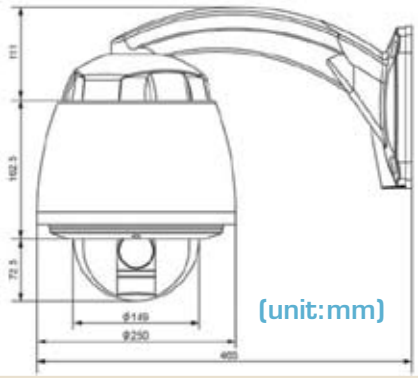

(unit:mm)

	FEATURES	CTSD-331
CAMERA	Image Device	1/4" SONY Ex-View CCD
	Effective Pixels	440k Pixels 752 (h) x 582 (v)
	H. Resolution	520 TV Lines
	S/N Ratio	More than 50dB
	Zoom	x30 Optical Zoom and x8 Digital Zoom
	Focal Length	F1.6~3.4, F=3.3 (wide)~99 (Tel) mm
	Minimum Illuminance	0.6 Lux / F1.6: Colour, 0.1 Lux / F1.6: B&W
	Day & Night	Auto / Day / Night (IR Cut Filter)
	Focus	Auto / Manual / Semi-Auto
	AE Mode	Auto / Iris / Shutter / Manual / Brightness
	White Balance	Auto / Manual (Red & Blue Gain Adjustable)
	BLC	On / Off
	WDR	On / Off
	Flicker-less	On / Off
PAN / TILT	Range	Pan: 360° (Endless) / Tilt: 95°
	Pan / Tilt / Speed	Preset: 360° Sec / Manual: 0.05°~360° Sec / Swing: 1°~180° Sec
	Preset	127 Presets with Labels / Independent preset Characteristic Set-up
	Pattern	4 Patterns
	Swing	8 Swings
	Group	8 Groups
	Other Functions	Auto Flip, Auto Parking, Power-up, Action etc
GENERAL	Communication	RS-485
	Protocol	Pelco-D, Pelco-P Selectable
	Privacy Zone	8 Zones
	Sensor In / Out	Built-in 4 input / 2 Output
	OSD	English On / Off
	Power	DC Typer: 12VDC / 1.0A
	Dimensions	Dome: 149mm (5.9") / Housing: 160(ø) x 212 (h) mm (6.3" (ø) x 8.3" (h))
	Weight	Approximately 2kg / 4.4lbs
	Operating Temperature	0°C~40°C / 32° F~104°F

CTSD-331

CamTron Outdoor PTZ Dome Camera

CTSC-5451 Joystick Controller

- Recalls programmed guard tours from each dome camera
- Controls from 1~255 camera
- Programmable user preferences. (preset, tour, group, etc)
- Designed for desktop use
- Variable manual control speed (Joystick)
- User password support
- Use Function keys to select the desired transmission speed (2.4~57.6 kbps)